



PRO-DOWN L EY

LED RECESSED DOWNLIGHT

PRODUCT INFORMATION

Light Source	:	Cree
Rated Luminous Efficacy	:	100-120 lm/W
LED Life Time	:	>50000 Hrs
Type	:	Indoor
SDCM Binning	:	3


ELECTRICAL

Power Supply	:	Hansa Green
Input Voltage	:	AC 100-240V
Input Freequency	:	50-60 Hz
Power Factor	:	0.9
Efficiency	:	90%
THD	:	<15%

GENERAL


Housing and Optics	:	Aluminium Die cast with Faceted Reflector and Glass Cover
Ambient Temperature	:	-20 to 50° Celcius
Storage Temperature	:	-20 to 55° Celcius
Humidity	:	RH 10%-90%
Rating	:	IP44
Body Color	:	White

PHOTOMETRIC DETAILS

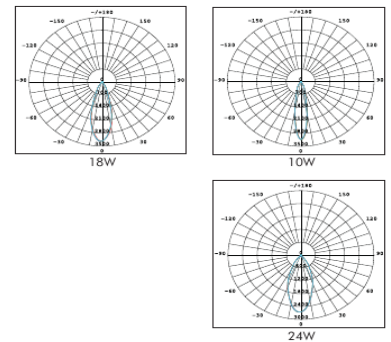

WARRANTY : 2 YEARS

DIMENSIONAL DETAILS

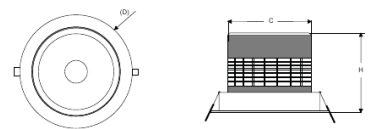

Model No.	Power (W)	Lumens	CCT	CRI	Beam Angle	Dimension (mm)
LN-DL-EY-10	10 W	1000lm±10%	3000K/4000K / 6500K	>70	22°	D:85,H:80,C:75 mm
LN-DL-EY-18	18 W	1800lm±10%	3000K/4000K / 6500K	>70	22°	D:107,H:80,C:95 mm
LN-DL-EY-24	24 W	2400lm±10%	3000K/4000K / 6500K	>70	22°	D:138,H:80,C:125 mm