




LAUREL R 40W LRL-R-40





 Luminaire shape

 Body color

 Die cast Aluminium Body

 IP44 Rated

 IP20 Rated Control gear

 50000 Hrs Lifetime


Laurel R is a versatile recessed down light that can be used widely in indoors, easy to mount on the ceiling recess. The luminaire offering a broad range of power, color temperatures and options like motion detection, timer, sleep and twilight function.

This range of products are popular for a wide range of application such as office spaces, Conference Halls, Foyers, Shops, residential and other indoor spaces.

Luminaire Details:





Product Name	: Laurel R
Product Type	: LED Recessed Down Light
Product code	: LRL-R-40
Efficiency Classification	: Class B
Luminaire Type	: COB
Fixture Type	: Fixed

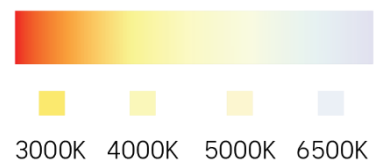Correlated Color Temperature:



Light Source Details:

Light Emission	: Spot Emission
Source brand	: Cree
Rated Power	: 40 W
CRI	: >80
UGR	: <19
McAdam Binning	: Step 3

CCT	Rated Lumens
 3000K	3800 lms
 4000K	4000 lms
 5000K	4200 lms
 6500K	4400 lms

Luminaire Housing:

Body	: Die cast Aluminium
Reflector type	: Silver Glossy /Mat Silver /White Reflector
Lens/Diffuser	: PC Diffuser
Storage Temperature (Ts)	: -40 to 60°C
Ambient Temperature (Ta)	: -20 to 50°C
Humidity	: RH 10-90 %

5 Years Product Warranty

Control Gear Specifications:

Control Gear Brand	: Hansa Green/Tridonic
Input Voltage	: 220-240V AC
Input Current	: 0.188A
Frequency	: 50/60Hz
Output Voltage	: 25-45V DC Max.
Output Current	: 1050 mA
Max. Output power	: 45W
Power Factor	: >0.9
THD	: <15%
Case temperature(Tc)	: 80°C
Ambient Temperature	: -20 to 60 C
Over voltage protection	: Available
Short circuit Protection	: Available
No-Load Protection	: Available
Burst Protection Voltage	: 1KV
Surge Protection Voltage	: 1KV(L to N) & 2KV(L/N to Earth)

Control Gear Compatibility:

Control Gear is the driving unit of LED. Laurel R is compatible with Phase cut dimming, 0-10/1-10V dimming and DALI Dimming control gears.



Optics and Beam Angle:

60° Optics

Add-on sensor Compatibility:



Laurel R is compatible with external add-on motion detection and daylight sensors.

Photometric Details:



Photometric testing provides a comprehensive laboratory service for testing the amount, colour, quality and spatial distribution of light emitted from lamps, LEDs and luminaires. The standard photometric data files in IES (.ies) and EULUMDAT (.ldt) formats per IES LM 79-08 and BS EN 13032

Emergency Compatibility:

Laurel R is compatible with emergency kits




Physical Dimensions:



Diameter	: 198 mm
Height	: 98 mm
Cut out	: 180 mm

Ordering Codes

CCT	Code
3000K	629225040521
4000K	629225040541
5000K	629225040561
6500K	629225040591



Flow unit: 2349 lm

Height	Beam Diameter	Angle: 72.85deg	Diameter
2m	337.23301x		147.50mm
3m	509.2.582.41x		235.15mm
4m	744.3.258.81x		342.73mm
5m	1027.99.181x		442.78mm
6m	136.56.64.721x		595.66mm
7m	187.87.47.541x		803.04mm
8m	26.56.36.481x		1100.61mm
9m	36.26.28.741x		1328.18mm
10m	48.17.23.301x		1475.77mm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

