



TRIMLESS ZIO-TZ*2 2X30W TZ2-30





 Luminaire Shape

 Frame Color

 Die cast Aluminium Body

 IP44 Rated

 IP20 Rated Control gear

 50000 Hrs Lifetime


TRIMLESS ZIO-TZ*2 Trimless Gimbal is a versatile recessed spot light that can be used widely in indoors, easy to mount on the ceiling recess. The luminaire offering a broad range of power, color temperatures and options like motion detection, timer, sleep and twilight function.

This range of products are popular for a wide range of application such as Retail Show rooms, Galleries, Exhibition Halls, Shopping Malls and other indoor spaces.

Luminaire Details:





Product Name	: Trimless Zio –TRZ*2
Product Type	: LED Recessed Trimless Gimbal Light
Product code	: TZ2-30
Efficiency Classification	: Class B
Luminaire Type	: COB
Fixture Type	: Adjustable

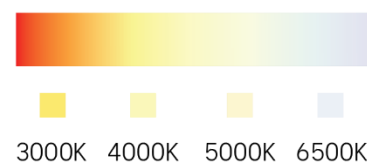Correlated Color Temperature:



Light Source Details:

Light Emission	: Spot Emission
Source brand	: Cree
Rated Power	: 30W
CRI	: >80
UGR	: <19
McAdam Binning	: Step 3

CCT	Rated Lumens
 3000K	2790 lms
 4000K	2850 lms
 5000K	3000 lms
 6500K	3150 lms

Luminaire Housing:

Body	: Die cast Aluminium
Reflector type	: Aluminum Reflector
Lens/Diffuser	: Glass Diffuser
Storage Temperature (Ts)	: -40 to 60°C
Ambient Temperature (Ta)	: -20 to 50°C
Humidity	: RH 10-90 %

5 Years Product Warranty

Control Gear Specifications:

Control Gear Brand	: Hansa Green/Tridonic
Input Voltage	: 220-240V AC
Input Current	: 0.130A
Frequency	: 50/60Hz
Output Voltage	: 25-45 V DC Max.
Output Current	: 750 mA
Max. Output power	: 30W
Power Factor	: >0.9
THD	: <15%
Case temperature(Tc)	: 80°C
Ambient Temperature	: -20 to 60 C
Over voltage protection	: Available
Short circuit Protection	: Available
No-Load Protection	: Available
Burst Protection Voltage	: 1KV
Surge Protection Voltage	: 1KV(L to N) & 2KV(L/N to Earth)

Control Gear Compatibility:

Control Gear is the driving unit of LED. Timless Zio Trimless Gimbal is compatible with Phase cut dimming, 0-10/1-10V dimming and DALI Dimming control gears.



Optics and Beam Angle:

24°, 60° Optics

Add-on sensor Compatibility:







Timless Zio Trimeless Gimbal is compatible with external add-on motion detection and daylight sensors.

Photometric Details:


Photometric testing provides a comprehensive laboratory service for testing the amount, colour, quality and spatial distribution of light emitted from lamps, LEDs and luminaires. The standard photometric data files in IES (.ies) and EULUMDAT (.ldt) formats per IES LM 79-08 and BS EN 13032

Emergency Compatibility:

Timless Zio Trimeless Gimbal is compatible with emergency kits

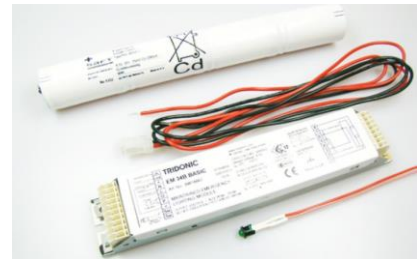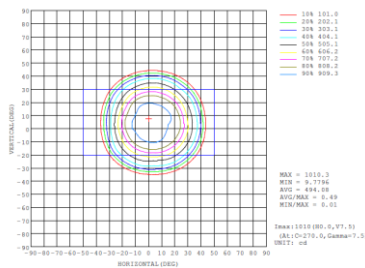

Physical Dimensions:



Length : 360X175 mm
 Height : 135 mm

Ordering Codes

CCT	Code
3000K	629105030521
4000K	629105030541
5000K	629105030561
6500K	629105030591