



CORVUS



 +971 65 260 706  sales-me@hansagreen.com

 Hamriyah Free Zone Sharjah, UAE.

CORVUS 10W

LED FAÇADE LIGHT

- ❑ Adjustable Beam Angles – Provides flexible light distribution.
- ❑ Long life: 50,000+ hrs - Minimal maintenance.
- ❑ High Luminous efficacy - More light output.
- ❑ Consistent Performance & Quality - Delivers stable brightness
- ❑ IP65 Rated – Protects against dust and water.




CS-FL-10

| Technical | IK08 | IP65 | UGR <19 | CRI >80 |
|--|------|------------------|---------|--------------|
| Light Source | | COB | | - |
| Luminous Efficacy (subject to a tolerance of ±10%) | | 100 | | Lumen / Watt |
| Correlated Colour Temperature (CCT) | | 3000/4000/6500 | | Kelvin |
| Lifetime | | 50,000 | | Hours |
| McAdam Binning | | 3 | | Step |
| Housing | | | | |
| Body | | Aluminium | | Die-cast |
| Lens / Diffuser | | Clear Glass | | |
| Reflector | | Chrome Reflector | | |
| Mounting | | Spike/Surface | | |
| Thermal | | | | |
| Ambient Temperature (Ta) | | -20 to 50 | | °Celsius |
| Storage Temperature (Ts) | | -20 to 50 | | °Celsius |
| Humidity | | 10 to 90 | | RH(%) |

ELECTRICAL CHARACTERISTICS

| | | |
|------------------------|------------|--------------------------------|
| Control Option | ON/OFF | PHASE DIMMING 1-10V DALI |
| Control Brand | Hansagreen | On/off |
| Rated Power | 10 | Watts |
| Input Current (@ 230V) | 0.043 | Amps |
| Input Voltage | 220 to 240 | VAC |
| Frequency | 50 to 60 | Hertz |
| Output Current | 300 | mA |
| Output Voltage | 21 to 42 | VDC |
| Power Factor | >0.9 | |

DIMENSIONAL DETAILS

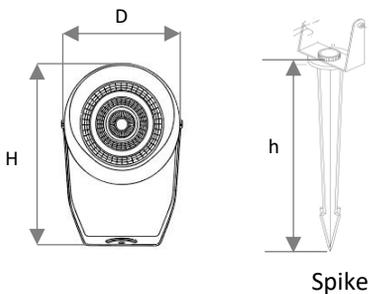

All measurements are in mm

| L/D | W | H | Cutout | Weight |
|-----|---|-----|--------|---------|
| 94Ø | - | 135 | - | 0.71 kg |
| | | 160 | | |

PHOTOMETRIC DETAILS

| | |
|------------|-------|
| Beam Angle | 26.6° |
|------------|-------|

