



CORVUS 30W

LED FAÇADE LIGHT

- ❑ Adjustable Beam Angles – Provides flexible light distribution.
- ❑ Long life: 50,000+ hrs - Minimal maintenance.
- ❑ High Luminous efficacy - More light output.
- ❑ Consistent Performance & Quality - Delivers stable brightness
- ❑ IP65 Rated – Protects against dust and water.




CS-FL-30

Technical		IK08	IP65	UGR <19	CRI >80
Light Source			COB		-
Luminous Efficacy (subject to a tolerance of ±10%)			100		Lumen / Watt
Correlated Colour Temperature (CCT)			3000/4000/6500		Kelvin
Lifetime			50,000		Hours
McAdam Binning			3		Step
Housing					
Body			Aluminium		Die-cast
Lens / Diffuser			Clear Glass		
Reflector			Chrome Reflector		
Mounting			Spike/Surface		
Thermal					
Ambient Temperature (Ta)			-20 to 50		°Celsius
Storage Temperature (Ts)			-20 to 50		°Celsius
Humidity			10 to 90		RH(%)

ELECTRICAL CHARACTERISTICS

Control Option	ON/OFF	PHASE DIMMING	1-10V	DALI
Control Brand	Hansagreen	On/off		
Rated Power	30	Watts		
Input Current (@ 230V)	0.13	Amps		
Input Voltage	220 to 240	VAC		
Frequency	50 to 60	Hertz		
Output Current	800	mA		
Output Voltage	21 to 42	VDC		
Power Factor	>0.85			

DIMENSIONAL DETAILS

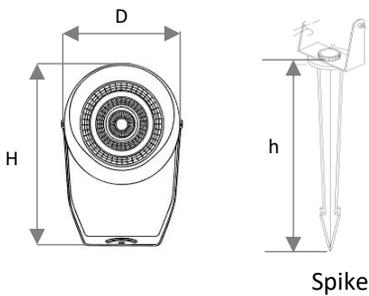

All measurements are in mm

L/D	W	H	Cutout	Weight
150Ø	-	210	-	1.81 kg
		205		

PHOTOMETRIC DETAILS

Beam Angle	24.4°
------------	-------

