



ROOKIE AQUA II



 +971 65 260 706  sales-me@hansagreen.com

 Hamriyah Free Zone Sharjah, UAE.

ROOKIE AQUA II 40W

LED SURFACE DOWNLIGHT

- IP65 dust & water protection.
- High visual-comfort optics.
- Premium die-cast housing
- Interchangeable reflector options
- Easy surface-mount installation




CQ-II-RD-40

Technical	IK02	IP65	UGR <19	CRI >80
Light Source	COB	-		
Luminous Efficacy (subject to a tolerance of ±10%)	100	Lumen / Watt		
Correlated Colour Temperature (CCT)	3000/4000/6500	Kelvin		
Lifetime	50,000	Hours		
McAdam Binning	3	Step		
Housing				
Body	Aluminium	Die-cast		
Lens / Diffuser	PC Lens			
Reflector	Black/White			
Mounting	Surface/Pendant			
Thermal				
Ambient Temperature (Ta)	-20 to 45	°Celsius		
Storage Temperature (Ts)	-20 to 50	°Celsius		
Humidity	10 to 90	RH(%)		

ELECTRICAL CHARACTERISTICS

Control Option	ON/OFF	PHASE DIMMING	1-10V	DALI
Control Brand	Hansagreen		On/off	
Rated Power	40		Watts	
Input Current (@ 230V)	0.17		Amps	
Input Voltage	220 to 240		VAC	
Frequency	50 to 60		Hertz	
Output Current	1050		mA	
Output Voltage	24 to 48		VDC	
Power Factor	>0.95			

DIMENSIONAL DETAILS

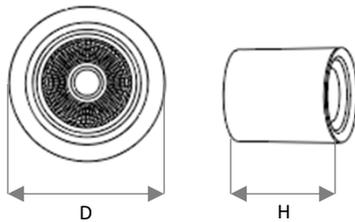

All measurements are in mm

L/D	W	H	Cutout	Weight
138Ø	-	165	-	1.44 kg

PHOTOMETRIC DETAILS

Beam Angle	28.3°
------------	-------

