



SPLASH RD



 +971 65 260 706  sales-me@hansagreen.com

 Hamriyah Free Zone Sharjah, UAE.

SPLASH RD 03W

LED INGROUND LIGHT

- Stainless steel trim corrosion protection
- IP67 strong water resistance.
- IK09 drive-over durability
- Durable toughened glass for safety.
- Seamless inground installation, no obstacles




BL-03-RD

Technical	IK10	IP67	UGR <19	CRI >80
Light Source		SMD	-	
Luminous Efficacy (subject to a tolerance of ±10%)		100		Lumen / Watt
Correlated Colour Temperature (CCT)		3000/4000/6500		Kelvin
Lifetime		50,000		Hours
McAdam Binning		3		Step
Housing				
Body		Stainless Steel Trim		Aluminium Die-cast body
Lens / Diffuser		Toughened Glass		
Reflector		-		
Mounting		Inground recessed		
Thermal				
Ambient Temperature (Ta)		-20 to 50		°Celsius
Storage Temperature (Ts)		-20 to 50		°Celsius
Humidity		10 to 90		RH(%)

ELECTRICAL CHARACTERISTICS

Control Option	ON/OFF	PHASE DIMMING 1-10V DALI
Control Brand	-	On/off
Rated Power	3	Watts
Input Current (@ 230V)	0.013	Amps
Input Voltage	220 to 240	VAC
Frequency	50 to 60	Hertz
Output Current	150	mA
Output Voltage	24 to 42	VDC
Power Factor	>0.95	

DIMENSIONAL DETAILS

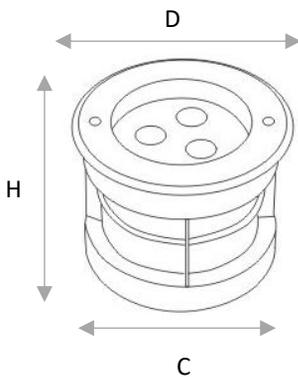

All measurements are in mm

L/D	W	H	Cutout	Weight
100Ø	-	80	95	0.51 kg

PHOTOMETRIC DETAILS

Beam Angle	31.6°
------------	-------

