



SPLASH RD TILTABLE



 +971 65 260 706  sales-me@hansagreen.com

 Hamriyah Free Zone Sharjah, UAE.

SPLASH RD TILTABLE 09W

LED INGROUND LIGHT

- Drive-Over** Rated – Safe for vehicle and foot traffic.
- SS 316** Trim – corrosion-resistant and durable.
- Adjustable Tilt Angle** – Direct light precisely in any desired direction.
- High Luminous efficacy - More light output.
- Long Life: 50,000+ hrs – Minimal maintenance.




BLX-09-RD

| Technical | | IK10 | IP67 | UGR <19 | CRI >80 |
|--|--|------|----------------------|---------|-----------------|
| Light Source | | | SMD | - | |
| Luminous Efficacy (subject to a tolerance of ±10%) | | | 100 | | Lumen / Watt |
| Correlated Colour Temperature (CCT) | | | 3000/4000/6500 | | Kelvin |
| Lifetime | | | 50,000 | | Hours |
| McAdam Binning | | | 3 | | Step |
| Housing | | | | | |
| Body | | | Aluminium | | Die-cast |
| Lens / Diffuser | | | Stainless Steel Trim | | Toughened Glass |
| Reflector | | | NA | | |
| Mounting | | | Inground recessed | | |
| Thermal | | | | | |
| Ambient Temperature (Ta) | | | -20 to 50 | | °Celsius |
| Storage Temperature (Ts) | | | -20 to 50 | | °Celsius |
| Humidity | | | 10 to 90 | | RH(%) |

ELECTRICAL CHARACTERISTICS

| | | |
|------------------------|------------|--|
| Control Option | ON/OFF |  PHASE DIMMING  1-10V  DALI |
| Control Brand | Tridonic | On/off |
| Rated Power | 9 | Watts |
| Input Current (@ 230V) | 0.03 | Amps |
| Input Voltage | 220 to 240 | VAC |
| Frequency | 50 to 60 | Hertz |
| Output Current | 250 | mA |
| Output Voltage | 24 to 42 | VDC |
| Power Factor | >0.95 | |

DIMENSIONAL DETAILS

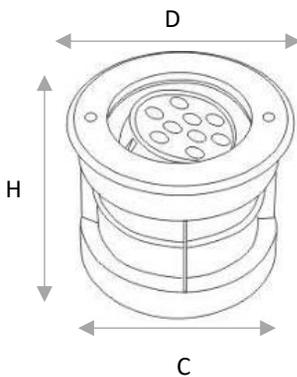

All measurements are in mm

| L/D | W | H | Cutout | Weight |
|------|---|-----|--------|---------|
| 160Ø | - | 154 | 145 | 1.59 kg |

PHOTOMETRIC DETAILS

| | |
|------------|-------|
| Beam Angle | 31.6° |
|------------|-------|

