




**BOLLAX CON**

 +971 65 260 706     sales-me@hansagreen.com

 Hamriyah Free Zone Sharjah, UAE.

# BOLLAX CON 15W

## LED BOLLARD LIGHT



- Uniform and precise lighting distribution
- Quick & easy installation
- Corrosion resistance
- High impact resistant body
- Dust & moisture proof




### BLXC-BLD-15W-XXXXK

Technical		IK09	IP66	UGR <18	CRI >80
Light Source		COB		-	
Luminous Efficacy (subject to a tolerance of ±10%)		80			Lumen / Watt
Correlated Colour Temperature (CCT)		2700/3000/4000/6500			Kelvin
Lifetime		50,000			Hours
McAdam Binning		4			Step
Housing					
Body		Aluminium Die Cast			
Lens / Diffuser		PC Glass			
Reflector		-			
Mounting		Surface			
Thermal					
Ambient Temperature (Ta)		-20 to 50			°Celsius
Storage Temperature (Ts)		-20 to 50			°Celsius
Humidity		10 to 95			RH(%)

**ELECTRICAL CHARACTERISTICS**

Control Option	ON/OFF		
Rated Power	15	Watts	
Input Current (@ 230V)	0.065	Amps	
Input Voltage	220 to 240	VAC	
Frequency	50 to 60	Hertz	
Output Current	0.416	Amps	
Output Voltage	15-42	VDC	
Power Factor	≥0.9		

**DIMENSIONAL DETAILS**

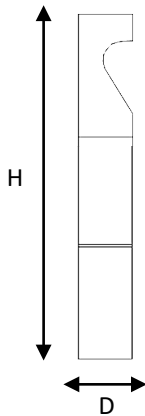

All measurements are in mm

D	H	W	Cutout	Weight
140Ø	1000	-	-	-

**PHOTOMETRIC DETAILS**

Beam Angle	64°
------------	-----

