




**BOLLAX GB**

 +971 65 260 706     sales-me@hansagreen.com

 Hamriyah Free Zone Sharjah, UAE.

# BOLLAX GB 75W

## LED COLUMN LIGHT



- Uniform and precise lighting distribution
- Corrosion resistance
- Quick & easy installation
- High impact resistant body
- Dust & moisture proof




### BLXGB-BLD-75W-XXXXK

Technical		IK09	IP66	UGR <18	CRI >80
Light Source		COB		-	
Luminous Efficacy (subject to a tolerance of ±10%)		105			Lumen / Watt
Correlated Colour Temperature (CCT)		2700/3000/4000/6500			Kelvin
Lifetime		50,000			Hours
McAdam Binning		4			Step
Housing					
Body		Aluminium Die Cast			
Lens / Diffuser		PC Diffuser			
Reflector		-			
Mounting		Surface			
Thermal					
Ambient Temperature (Ta)		-20 to 50			°Celsius
Storage Temperature (Ts)		-20 to 50			°Celsius
Humidity		10 to 95			RH(%)

## ELECTRICAL CHARACTERISTICS

Control Option	ON/OFF  1-10V 
Rated Power	75 Watts
Input Current (@ 230V)	0.326 Amps
Input Voltage	100 to 240 VAC
Frequency	50 to 60 Hertz
Output Current	2.08 Amps
Output Voltage	18 - 54 VDC
Power Factor	$\geq 0.9$

## DIMENSIONAL DETAILS

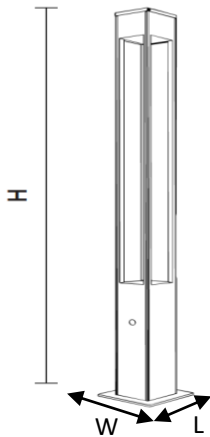

All measurements are in mm

L	H	W	Cutout	Weight
140	2200	140	-	-

## PHOTOMETRIC DETAILS

Beam Angle	105°
------------	------

