



**BOLLAX LB**

 +971 65 260 706     sales-me@hansagreen.com

 Hamriyah Free Zone Sharjah, UAE.

# BOLLAX LB 75W

## LED COLUMN LIGHT

- Uniform and precise lighting distribution
- Corrosion-resistant body - Ensures long-lasting durability.
- Long life: 50,000+ hrs - Minimal maintenance.
- Quick & easy installation - with accessible mounting design.
- Consistent Performance & Quality - Delivers stable brightness.


### BLXLB-BLD-75W-XXXXK

Technical		IK09	IP66	UGR <18	CRI >80
Light Source		SMD		-	
Luminous Efficacy (subject to a tolerance of ±10%)		140		Lumen / Watt	
Correlated Colour Temperature (CCT)		2700/3000/4000/6500		Kelvin	
Lifetime		50,000		Hours	
McAdam Binning		3		Step	
Housing					
Body		Aluminium Die Cast			
Lens / Diffuser		PC Lens			
Reflector		-			
Mounting		Surface			
Thermal					
Ambient Temperature (Ta)		-20 to 50		°Celsius	
Storage Temperature (Ts)		-20 to 50		°Celsius	
Humidity		10 to 95		RH(%)	

## ELECTRICAL CHARACTERISTICS

Control Option	ON/OFF 1-10V	
Rated Power	75	Watts
Input Current (@ 230V)	0.32	Amps
Input Voltage	190 to 240	VAC
Frequency	50 to 60	Hertz
Output Current	350	Amps
Output Voltage	24 to 42	VDC
Power Factor	≥0.9	

## DIMENSIONAL DETAILS

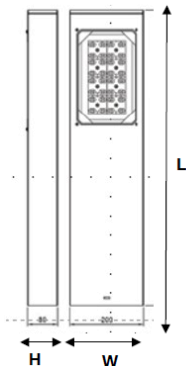

All measurements are in mm

L	H	W	Cutout	Weight
860	80	200	-	7.90 kg

## PHOTOMETRIC DETAILS

Beam Angle	107.2°
------------	--------

