




## BOLLAX MR



 +971 65 260 706     sales-me@hansagreen.com

 Hamriyah Free Zone Sharjah, UAE.

# BOLLAX MR 20W

## LED BOLLARD LIGHT

- Uniform and precise lighting distribution
- Quick & easy installation
- Corrosion resistance
- High impact resistant body
- Dust & moisture proof




### BLXMR-BLD-20W-XXXXK

Technical		IK09	IP66	UGR <18	CRI >80
Light Source		SMD		-	
Luminous Efficacy (subject to a tolerance of ±10%)		132		Lumen / Watt	
Correlated Colour Temperature (CCT)		2700/3000/4000/6500		Kelvin	
Lifetime		50,000		Hours	
McAdam Binning		3		Step	
Housing					
Body		Aluminium Die Cast Body			
Lens / Diffuser		Clear PC Lens			
Reflector		-			
Mounting		Surface			
Thermal					
Ambient Temperature (Ta)		-20 to 50		°Celsius	
Storage Temperature (Ts)		-20 to 50		°Celsius	
Humidity		10 to 95		RH(%)	

## ELECTRICAL CHARACTERISTICS

Control Option	ON/OFF	PHASE DIMMING	1-10V	DALI
Rated Power	20			Watts
Input Current (@ 230V)	0.086			Amps
Input Voltage	220 to 240			VAC
Frequency	50 to 60			Hertz
Output Current	0.833			Amps
Output Voltage	15-50			VDC
Power Factor	≥0.9			

## DIMENSIONAL DETAILS

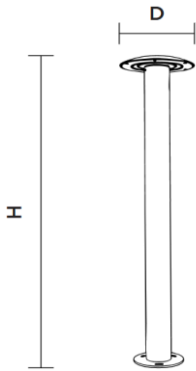

All measurements are in mm

D	H	W	Cutout	Weight
230Ø	1000	-	-	-

## PHOTOMETRIC DETAILS

Beam Angle	128.5°
------------	--------

