




## CELESTIUM MINI



 +971 65 260 706     [sales-me@hansagreen.com](mailto:sales-me@hansagreen.com)

 Hamriyah Free Zone Sharjah, UAE.

# CELESTIUM MINI 40W

## LED CANOPY LIGHT


- Multiple beam options
- High heat dissipation
- High luminous efficacy
- High impact resistant body
- Dust & moisture proof




### CPS-M-40

Technical		IK10	IP66	UGR <19	CRI >80
Light Source			SMD		
Luminous Efficacy (subject to a tolerance of ±10%)			160		Lumen / Watt
Correlated Colour Temperature (CCT)			3000/4000/6500		Kelvin
Lifetime			50,000		Hours
McAdam Binning			3		Step
Housing					
Body			Aluminium		Die-cast
Lens / Diffuser			PC Lens		
Reflector			-		
Mounting			Recessed		
Thermal					
Ambient Temperature (Ta)			-20 to 50		°Celsius
Storage Temperature (Ts)			-20 to 50		°Celsius
Humidity			10 to 90		RH(%)

## ELECTRICAL CHARACTERISTICS

Control Option	ON/OFF	1-10V	
Rated Power	40	Watts	
Input Current (@ 230V)	0.17	Amps	
Input Voltage	100 to 240	VAC	
Frequency	50 to 60	Hertz	
Output Current	800	mA	
Output Voltage	17-54	VDC	
Power Factor	>0.9		

## DIMENSIONAL DETAILS

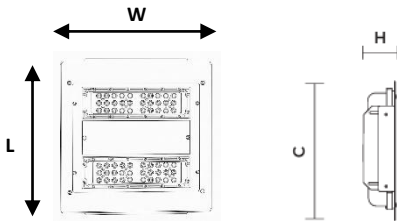

All measurements are in mm

L/D	W	H	Cutout	Weight
350	350	82	326x291	6.07 Kg

## PHOTOMETRIC DETAILS

Beam Angle	64.7°
------------	-------

