



## CIVIC 2T



 +971 65 260 706     sales-me@hansagreen.com

 Hamriyah Free Zone Sharjah, UAE.

# CIVIC 2T 400W

## LED FLOOD LIGHT

- ❑ High Luminous efficacy - More light output
- ❑ Efficient Heat Dissipation – Die-cast aluminum housing
- ❑ Long life: 50,000+ hrs - Minimal maintenance
- ❑ Adjustable Bracket – Easy installation & aiming
- ❑ Consistent Performance & Quality - Delivers stable brightness




### CV2T-FLD-400

Technical		IK10	IP66	UGR <19	CRI >80
Light Source			SMD		-
Luminous Efficacy (subject to a tolerance of ±10%)			140		Lumen / Watt
Correlated Colour Temperature (CCT)			3000/4000/6500		Kelvin
Lifetime			50,000		Hours
McAdam Binning			3		Step
Housing					
Body			Aluminium Die Cast		
Lens / Diffuser			PC Lens		
Reflector			-		
Mounting			Surface		
Thermal					
Ambient Temperature (Ta)			-20 to 50		°Celsius
Storage Temperature (Ts)			-20 to 50		°Celsius
Humidity			10 to 95		RH(%)

## ELECTRICAL CHARACTERISTICS

Control Option	ON/OFF 1-10V	
Rated Power	400	Watts
Input Current (@ 230V)	1.73	Amps
Input Voltage	100 to 240	VAC
Frequency	50 to 60	Hertz
Output Current	5.5 * 2	Amps
Output Voltage	18 to 57	VDC
Power Factor	≥0.9	

## DIMENSIONAL DETAILS

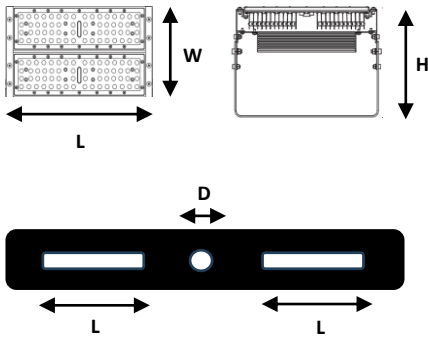

All measurements are in mm

L	W	H	Cutout	Weight
445	315	160	-	7.19 Kg

Bracket Dimensions in mm

L	W	D	Cutout	Weight
85	-	15	-	-

## PHOTOMETRIC DETAILS

Beam Angle	73.1°
------------	-------

