



**CIVIC T**



 +971 65 260 706     [sales-me@hansagreen.com](mailto:sales-me@hansagreen.com)

 Hamriyah Free Zone Sharjah, UAE.

# CIVIC T 400W

## LED FLOOD LIGHT

- ❑ High Luminous efficacy - More light output
- ❑ Efficient Heat Dissipation – Die-cast aluminum housing
- ❑ Long life: 50,000+ hrs - Minimal maintenance
- ❑ Adjustable Bracket – Easy installation & aiming
- ❑ Consistent Performance & Quality - Delivers stable brightness




### CVT-FLD-400

Technical		IK10	IP66	UGR <19	CRI >80
Chip		SMD			
Luminous Efficacy (subject to a tolerance of ±10%)		120		Lumen / Watt	
Correlated Colour Temperature (CCT)		3000/4000/6500		Kelvin	
Lifetime		50,000		Hours	
McAdam Binning		3		Step	
Housing					
Body		Aluminium		Die-cast	
Lens / Diffuser		PC Lens			
Reflector		-			
Mounting		Surface			
Thermal					
Ambient Temperature (Ta)		-20 to 50		°Celsius	
Storage Temperature (Ts)		-20 to 50		°Celsius	
Humidity		10 to 95		RH(%)	

## ELECTRICAL CHARACTERISTICS

Control Option	ON/OFF	
Rated Power	400	Watts
Input Current (@ 230V)	1.73	Amps
Input Voltage	100 to 240	VAC
Frequency	50 to 60	Hertz
Output Current	5.56*2	Amps
Output Voltage	18 to 57	VDC
Power Factor	≥0.9	

## DIMENSIONAL DETAILS

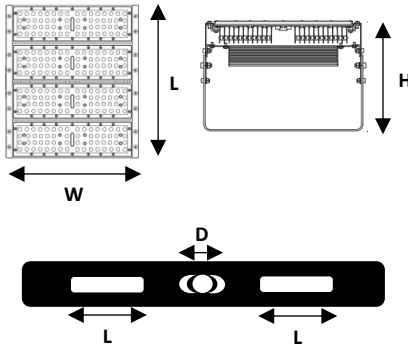

All measurements are in mm

L	W	H	Cutout	Weight
415	340	160	-	5.73 Kg

Bracket Dimensions in mm

L	W	D	Cutout	Weight
45	-	8	-	-

## PHOTOMETRIC DETAILS

Beam Angle	55.1°
------------	-------

