




**CIVIC T**



 +971 65 260 706     [sales-me@hansagreen.com](mailto:sales-me@hansagreen.com)

 Hamriyah Free Zone Sharjah, UAE.

# CIVIC T 600W

## LED FLOOD LIGHT

- ❑ High Luminous efficacy - More light output
- ❑ Efficient Heat Dissipation – Die-cast aluminum housing
- ❑ Long life: 50,000+ hrs - Minimal maintenance
- ❑ Adjustable Bracket – Easy installation & aiming
- ❑ Consistent Performance & Quality - Delivers stable brightness




### CVT-FLD-600

Technical		IK10	IP66	UGR <19	CRI ≥80
Chip			SMD		
Luminous Efficacy (subject to a tolerance of ±10%)			120		Lumen / Watt
Correlated Colour Temperature (CCT)			3000/4000/6500		Kelvin
Lifetime			50,000		Hours
McAdam Binning			3		Step
Housing					
Body			Aluminium		Die-cast
Lens / Diffuser			PC Lens		
Reflector			-		
Mounting			Surface		
Thermal					
Ambient Temperature (Ta)			-20 to 50		°Celsius
Storage Temperature (Ts)			-20 to 50		°Celsius
Humidity			10 to 95		RH(%)

## ELECTRICAL CHARACTERISTICS

Control Option	ON/OFF 1-10V
Rated Power	600 Watts
Input Current (@ 230V)	2.60 Amps
Input Voltage	100 to 240 VAC
Frequency	50 to 60 Hertz
Output Current	5.56*3 Amps
Output Voltage	18 to 57 VDC
Power Factor	≥0.9

## DIMENSIONAL DETAILS

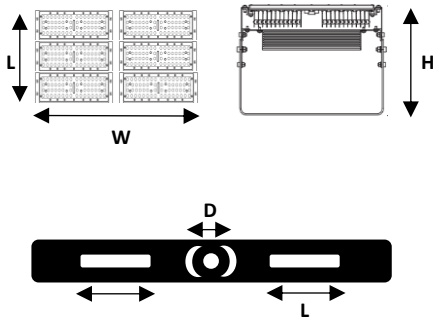

All measurements are in mm

L	W	H	Cutout	Weight
310	650	200	-	9.17 Kg

Bracket Dimensions in mm

L	W	D	Cutout	Weight
45	-	8	-	-

## PHOTOMETRIC DETAILS

Beam Angle	54.0°
------------	-------

