



**CORILLO CB**



 +971 65 260 706     [sales-me@hansagreen.com](mailto:sales-me@hansagreen.com)

 Hamriyah Free Zone Sharjah, UAE.

# CORILLO CB 30W

## LED RECESSED DOWN LIGHT

- ❑ **Centre Frosted Glass** – Creates smooth, glare-free lighting.
- ❑ Easy Installation - **Tool-free** spring-clip installation.
- ❑ Long Life: 50,000+ hrs - Minimal maintenance.
- ❑ High Luminous Efficacy - More light output.
- ❑ Consistent Performance & Quality - Delivers stable brightness.




### CDL-CB-30

Technical		IK02	IP44	UGR <19	CRI >80
Light Source			SMD	-	
Luminous Efficacy (subject to a tolerance of ±10%)			100		Lumen / Watt
Correlated Colour Temperature (CCT)			3000/4000/6500		Kelvin
Lifetime			50,000		Hours
McAdam Binning			3		Step
Housing					
Body			Aluminium		Die-cast
Lens / Diffuser			Center frosted Glass		
Reflector			Faceted Reflector		
Mounting			Recessed		
Thermal					
Ambient Temperature (Ta)			-20 to 45		°Celsius
Storage Temperature (Ts)			-20 to 50		°Celsius
Humidity			10 to 90		RH(%)

## ELECTRICAL CHARACTERISTICS

Control Option	ON/OFF	PHASE DIMMING 1-10V DALI
Control Brand	Hansagreen/Tridonic	On/off
Rated Power	30	Watts
Input Current (@ 230V)	0.13	Amps
Input Voltage	220 to 240	VAC
Frequency	50 to 60	Hertz
Output Current	750	mA
Output Voltage	24 to 48	VDC
Power Factor	>0.95	

## DIMENSIONAL DETAILS

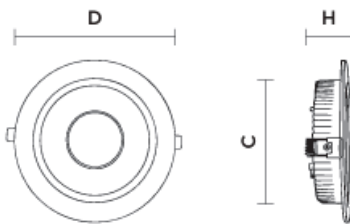

All measurements are in mm

L/D	W	H	Cutout	Weight
225Ø		63	198Ø	0.62 kg

## PHOTOMETRIC DETAILS

Beam Angle	85.3°
------------	-------

