



LUMIBROOK SLIM



 +971 65 260 706  sales-me@hansagreen.com

 Hamriyah Free Zone Sharjah, UAE.

LUMIBROOK SLIM 15W

LED WEATHERPROOF LIGHT

- Quick & easy installation.
- Consistent output.
- PC diffuser for long life.
- Tool-free clips for effortless servicing.
- Dust & moisture proof.




LBK-SLM-4F-15

Technical		IK09	IP65	UGR <21	CRI >80
Light Source		SMD			
Luminous Efficacy (subject to a tolerance of ±10%)		120		Lumen / Watt	
Correlated Colour Temperature (CCT)		3000/4000/6500		Kelvin	
Lifetime		50,000		Hours	
McAdam Binning		3		Step	
Housing					
Body		ABS Plastic			
Lens / Diffuser		PC Diffuser			
Reflector		-			
Mounting		Surface			
Thermal					
Ambient Temperature (Ta)		-20 to 50		°Celsius	
Storage Temperature (Ts)		-20 to 50		°Celsius	
Humidity		10 to 90		RH(%)	

ELECTRICAL CHARACTERISTICS

Control Option	ON/OFF	PHASE DIMMING	1-10V	DALI
Rated Power	15		Watts	
Input Current (@ 230V)	0.06		Amps	
Input Voltage	220 to 240		VAC	
Frequency	50 to 60		Hertz	
Output Current	0.41		Amps	
Output Voltage	24 to 42		VDC	
Power Factor	≥ 0.95			

DIMENSIONAL DETAILS

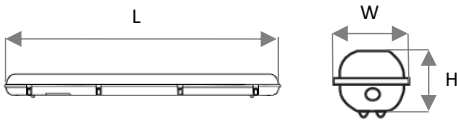

All measurements are in mm

L	W	H	Cutout	Weight
1200	82	75	-	0.6 kg

PHOTOMETRIC DETAILS

Beam Angle	120.8°
------------	--------

