



PATIO CUBE



 +971 65 260 706  sales-me@hansagreen.com

 Hamriyah Free Zone Sharjah, UAE.

PATIO CUBE 1x15W

LED WALL LIGHT

- High Luminous Efficacy - More light output
- Long Life: 50,000 hrs - Minimal maintenance
- Consistent Performance & Quality - Delivers stable brightness
- Upward Illumination – Provides ambient wall lighting.
- IP65 Rated – Protection against dust and water.




CU-WDL-1*15

| Technical | IK08 | IP65 | UGR <19 | CRI >80 |
|--|------|--------------------|---------|--------------|
| Light Source | | COB | - | |
| Luminous Efficacy (subject to a tolerance of ±10%) | | 100 | | Lumen / Watt |
| Correlated Colour Temperature (CCT) | | 3000/4000/6500 | | Kelvin |
| Lifetime | | 50,000 | | Hours |
| McAdam Binning | | 3 | | Step |
| Housing | | | | |
| Body | | Aluminium Die Cast | | |
| Lens / Diffuser | | Clear Glass | | |
| Reflector | | Chrome Reflector | | |
| Mounting | | Wall mounting | | |
| Thermal | | | | |
| Ambient Temperature (Ta) | | -20 to 50 | | °Celsius |
| Storage Temperature (Ts) | | -20 to 50 | | °Celsius |
| Humidity | | 10 to 95 | | RH(%) |

ELECTRICAL CHARACTERISTICS

| | | | | |
|------------------------|-------------|---|---|--|
| Control Option | ON/OFF |  PHASE DIMMING |  1-10V |  DALI |
| Rated Power | 15 | Watts | | |
| Input Current (@ 230V) | 0.06 | Amps | | |
| Input Voltage | 220 to 240 | VAC | | |
| Frequency | 50 to 60 | Hertz | | |
| Output Current | 0.4 | Amps | | |
| Output Voltage | 24 to 42 | VDC | | |
| Power Factor | ≥ 0.95 | | | |

DIMENSIONAL DETAILS

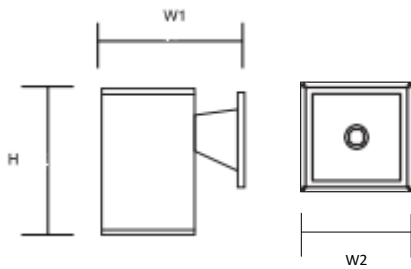

All measurements are in mm

| L | W1 | H | W2 | Weight |
|---|-----|-----|----|---------|
| - | 150 | 195 | 90 | 0.85 kg |

PHOTOMETRIC DETAILS

| | |
|------------|-------|
| Beam Angle | 22.8° |
|------------|-------|

