



RECBUL



 +971 65 260 706  sales-me@hansagreen.com

 Hamriyah Free Zone Sharjah, UAE.

RECBUL 40W

LED BULKHEAD LIGHT



- Durable construction
- Low maintenance
- High impact resistant body
- Dust & moisture proof
- Easy installation




BLK-RB-40

Technical		IK08	IP65	UGR <21	CRI >80
Light Source			SMD		
Luminous Efficacy (subject to a tolerance of ±10%)			100		Lumen / Watt
Correlated Colour Temperature (CCT)			3000/4000/6500		Kelvin
Lifetime			50,000		Hours
McAdam Binning			3		Step
Housing					
Body			Aluminium Die Cast		
Lens / Diffuser			PC Prismatic Diffuser		
Reflector			-		
Mounting			Surface		
Thermal					
Ambient Temperature (Ta)			-20 to 50		°Celsius
Storage Temperature (Ts)			-20 to 50		°Celsius
Humidity			10 to 95		RH(%)

ELECTRICAL CHARACTERISTICS

Control Option	ON/OFF	 PHASE DIMMING	 1-10V	 DALI
Rated Power	40	Watts		
Input Current (@ 230V)	0.17	Amps		
Input Voltage	220 to 240	VAC		
Frequency	50 to 60	Hertz		
Output Current	1.050	Amps		
Output Voltage	24 to 42	VDC		
Power Factor	>0.9			

DIMENSIONAL DETAILS

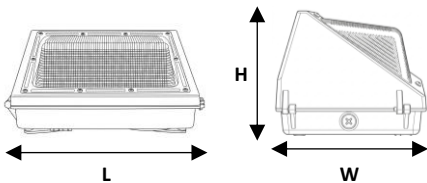

All measurements are in mm

L	W	H	Cutout	Weight
315	177	140	-	- kg

PHOTOMETRIC DETAILS

Beam Angle	103.1°
------------	--------

