




ZENO

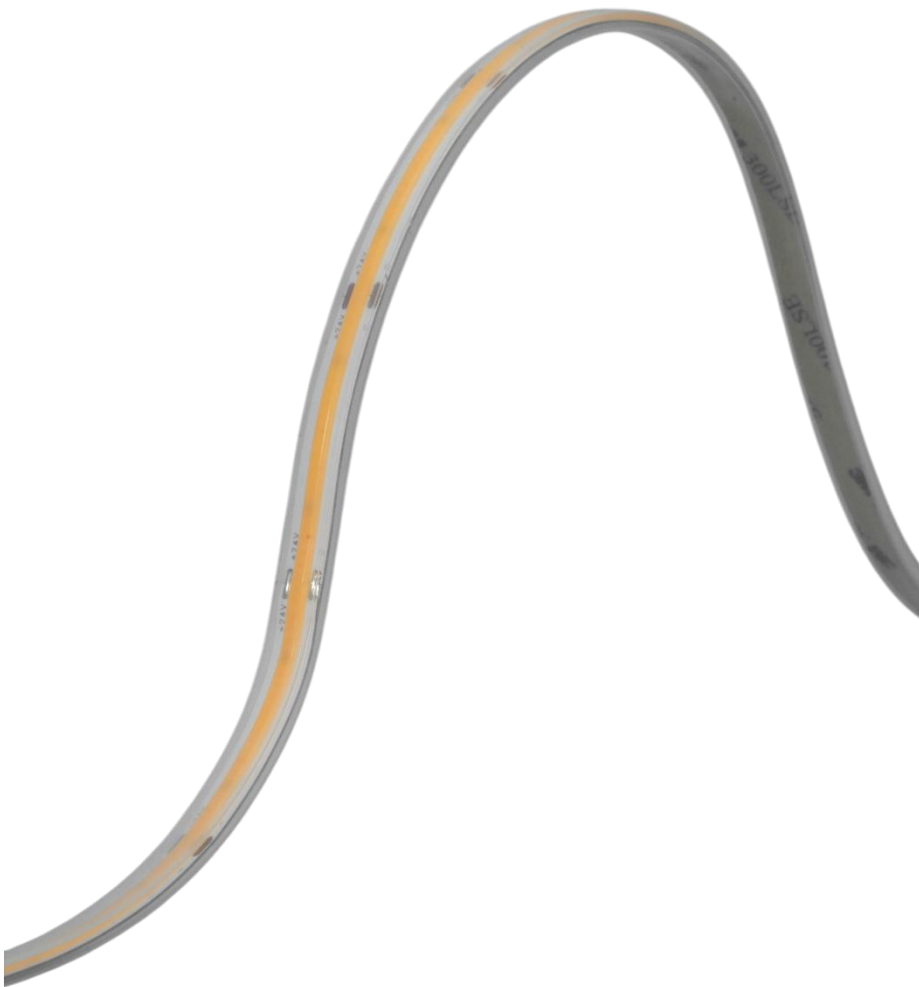

+971 65 260 706    sales-me@hansagreen.com

Hamriyah Free Zone Sharjah, UAE.

# ZENO 27K 9.6W/m

## LED STRIP LIGHT




- Cut-to-length & **flexible** — fits curves, corners, tight spaces.
- Plug & Play** – Easy and quick installation.
- Consistent Performance & Quality - Delivers stable brightness.
- Long Life: 50,000 hrs - Minimal maintenance.
- High Luminous Efficacy - More light output.



### Z20K-120-96-20


| Technical  |  | IP20      | UGR <19 | CRI >80      |
|--|--|-----------|---------|--------------|
| Chip   |  | SMD       |         | Bridgelux    |
| Luminous Efficacy (subject to a tolerance of ±10%) |  | 100       |         | Lumen / Watt |
| Correlated Colour Temperature (CCT)                |  | 2700      |         | Kelvin       |
| Lifetime   |  | 50,000    |         | Hours        |
| McAdam Binning                                     |  | 3         |         | Step         |
| Housing  |  |           |         |              |
| Body   |  | Silicon   |         |              |
| Lens / Diffuser                                    |  | NA        |         |              |
| Reflector  |  | NA        |         |              |
| Mounting   |  | NA        |         |              |
| Thermal  |  |           |         |              |
| Ambient Temperature (Ta)                           |  | -20 to 45 |         | °Celsius     |
| Storage Temperature (Ts)                           |  | -20 to 50 |         | °Celsius     |
| Humidity   |  | 10 to 90  |         | RH(%)        |

## ELECTRICAL CHARACTERISTICS

|                        |            |  |
|------------------------|------------|--|
| Control Option         | ON/OFF     |  PHASE DIMMING<br> 1-10V<br> DALI |
| Control Brand          | Meanwell   | On/off   |
| Rated Power            | 9.6W/m     | Watts  |
| Input Current (@ 230V) | 0.4        | Amps   |
| Input Voltage          | 220 to 240 | VAC  |
| Frequency              | 50 to 60   | Hertz  |
| Output Current         | -          | mA   |
| Output Voltage         | 24V        | VDC  |
| Power Factor           | >0.95      |  |

## DIMENSIONAL DETAILS

All measurements are in mm



| L/D | W | H | Cutttable length | Weight  |
|-----|---|---|------------------|---------|
| 5m  | 8 | - | 50               | 0.05 Kg |