




ZENO

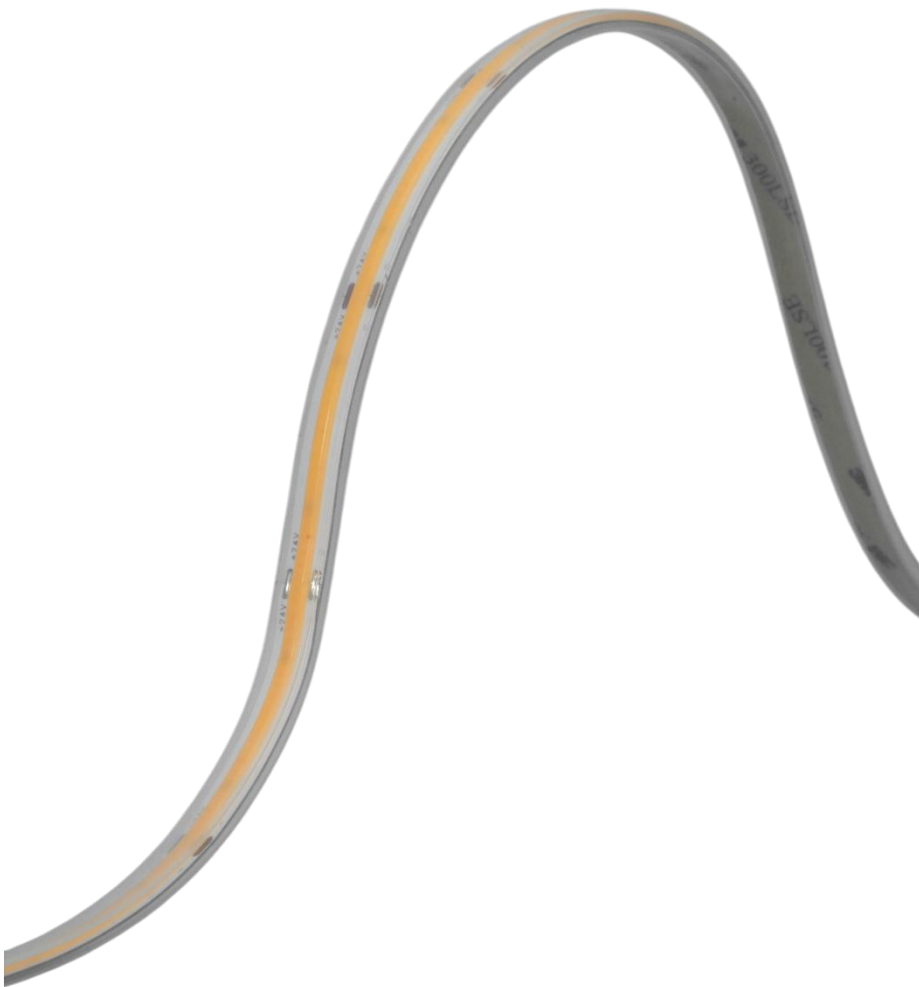

 +971 65 260 706     sales-me@hansagreen.com

 Hamriyah Free Zone Sharjah, UAE.

# ZENO 40K 9.6W/m

## LED STRIP LIGHT




- Cut-to-length & **flexible** — fits curves, corners, tight spaces.
- Plug & Play** – Easy and quick installation.
- Consistent Performance & Quality - Delivers stable brightness.
- Long Life: 50,000 hrs - Minimal maintenance.
- High Luminous Efficacy - More light output.



### Z20K-120-96-20


Technical		IP20	UGR <19	CRI >80
Chip		SMD	Bridgelux	
Luminous Efficacy (subject to a tolerance of ±10%)		100	Lumen / Watt	
Correlated Colour Temperature (CCT)		4000	Kelvin	
Lifetime		50,000	Hours	
McAdam Binning		3	Step	
Housing				
Body		Silicon		
Lens / Diffuser		NA		
Reflector		NA		
Mounting		NA		
Thermal				
Ambient Temperature (Ta)		-20 to 45	°Celsius	
Storage Temperature (Ts)		-20 to 50	°Celsius	
Humidity		10 to 90	RH(%)	

## ELECTRICAL CHARACTERISTICS

Control Option	ON/OFF	 PHASE DIMMING  1-10V  DALI
Control Brand	Meanwell	On/off
Rated Power	9.6W/m	Watts
Input Current (@ 230V)	0.4	Amps
Input Voltage	220 to 240	VAC
Frequency	50 to 60	Hertz
Output Current	-	mA
Output Voltage	24V	VDC
Power Factor	>0.95	

## DIMENSIONAL DETAILS

All measurements are in mm



L/D	W	H	Cutttable length	Weight
5m	8	-	50	0.05 Kg