



# NEGOZIO BOX GIMBAL-BGX2 2X20W BG2-20





 Luminaire Shape

  Frame Color

 Die cast Aluminium Body

 IP44 Rated

 IP20 Rated Control gear

 50000 Hrs Lifetime


Negozio Box Gimbal is a versatile recessed spot light that can be used widely in indoors, easy to mount on the ceiling recess. The luminaire offering a broad range of power, color temperatures and options like motion detection, timer, sleep and twilight function.

This range of products are popular for a wide range of application such as Retail Show rooms, Galleries, Exhibition Halls, Shopping Malls and other indoor spaces.

### Luminaire Details:





Product Name	: Negozio Box Gimbal-BGX2
Product Type	: LED Recessed Gimbal Light
Product code	: BG2-20
Efficiency Classification	: Class B
Luminaire Type	: COB
Fixture Type	: Adjustable
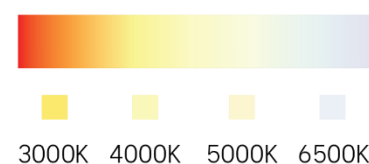
### Correlated Color Temperature:



### Light Source Details:

Light Emission	: Spot Emission
Source brand	: Cree
Rated Power	: 20W
CRI	: >80
UGR	: <19
McAdam Binning	: Step 3

CCT	Rated Lumens
 3000K	1860 lms
 4000K	1900 lms
 5000K	2000 lms
 6500K	2100 lms

### Luminaire Housing:

Body	: Die cast Aluminium
Reflector type	: Aluminum Reflector
Lens/Diffuser	: Glass Diffuser
Storage Temperature (Ts)	: -40 to 60°C
Ambient Temperature (Ta)	: -20 to 50°C
Humidity	: RH 10-90 %

**5 Years Product Warranty**

Control Gear Specifications:

Control Gear Brand	: Hansa Green/Tridonic
Input Voltage	: 220-240V AC
Input Current	: 0.085A
Frequency	: 50/60Hz
Output Voltage	: 36-72 V DC Max.
Output Current	: 300 mA
Max. Output power	: 20W
Power Factor	: >0.9
THD	: <15%
Case temperature(Tc)	: 80°C
Ambient Temperature	: -20 to 60 C
Over voltage protection	: Available
Short circuit Protection	: Available
No-Load Protection	: Available
Burst Protection Voltage	: 1KV
Surge Protection Voltage	: 1KV(L to N) & 2KV(L/N to Earth)

**Control Gear Compatibility:**

Control Gear is the driving unit of LED. Negozio Box Gimbal is compatible with Phase cut dimming, 0-10/1-10V dimming and DALI Dimming control gears.



**Optics and Beam Angle:**

24°, 60° Optics




**Add-on sensor Compatibility:**



Negozio Box Gimbal is compatible with external add-on motion detection and daylight sensors.


Photometric Details:

Photometric testing provides a comprehensive laboratory service for testing the amount, colour, quality and spatial distribution of light emitted from lamps, LEDs and luminaires. The standard photometric data files in IES (.ies) and EULUMDAT (.ldt) formats per IES LM 79-08 and BS EN 13032

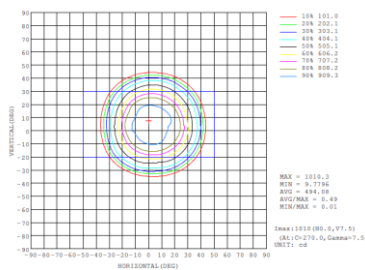



**Emergency Compatibility:**

Negozio Box Gimbal is compatible with emergency kits

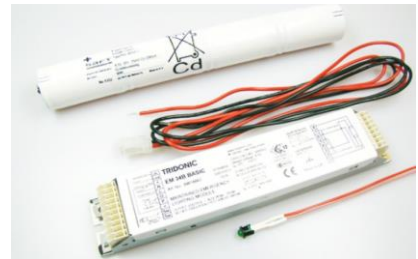

**Physical Dimensions:**



Length	: 305X165 mm
Height	: 135 mm
Cut out	: 295X155 mm

Ordering Codes

CCT	Code
3000K	629061020521
4000K	629061020541
5000K	629061020561
6500K	629061020591